





teknè



Dimensioni espresse in millimetri
Potenza espressa in Watt
Radiatore in alluminio.

Dimension expressed in millimetres
Output expressed in Watt
Aluminium radiator.

| | H | D | L | | | | | i | Finiture / Finishing |
|-------------|------|------|------|------|------|-----|------|------|----------------------|
| | (mm) | (mm) | (mm) | (lt) | (W) | (W) | | | |
| H 700-12 P | 683 | 60 | 575 | 2,4 | 516 | 284 | 600 | 540 | |
| H 700-17 P | 683 | 60 | 825 | 3,4 | 731 | 402 | - | 540 | |
| H 700-25* P | 683 | 60 | 1225 | 5,0 | 1075 | 591 | - | 540 | |
| H 700-31* P | 683 | 60 | 1525 | 6,2 | 1333 | 733 | - | 540 | |
| H 1800-6 P | 1783 | 60 | 275 | 3,1 | 728 | 400 | 800 | 1640 | |
| H 1800-10 P | 1783 | 60 | 475 | 5,2 | 1213 | 667 | 1300 | 1640 | |
| H 2000-12 P | 1983 | 60 | 575 | 6,9 | 1624 | 893 | 1500 | 1840 | |
| H 600-12 | 566 | 60 | 575 | 3,4 | 516 | 284 | 600 | 540 | |
| H 600-17 | 566 | 60 | 825 | 3,4 | 731 | 402 | - | 540 | |
| H 600-25 | 566 | 60 | 1225 | 5,0 | 1075 | 591 | - | 540 | |
| H 600-31 | 566 | 60 | 1525 | 6,2 | 1333 | 733 | - | 540 | |
| H 1700-6 | 1666 | 60 | 275 | 3,2 | 728 | 400 | 800 | 1640 | |
| H 1700-10 | 1666 | 60 | 475 | 5,2 | 1213 | 667 | 1300 | 1640 | |
| H 1900-12 | 1866 | 60 | 575 | 6,9 | 1624 | 893 | 1500 | 1840 | |

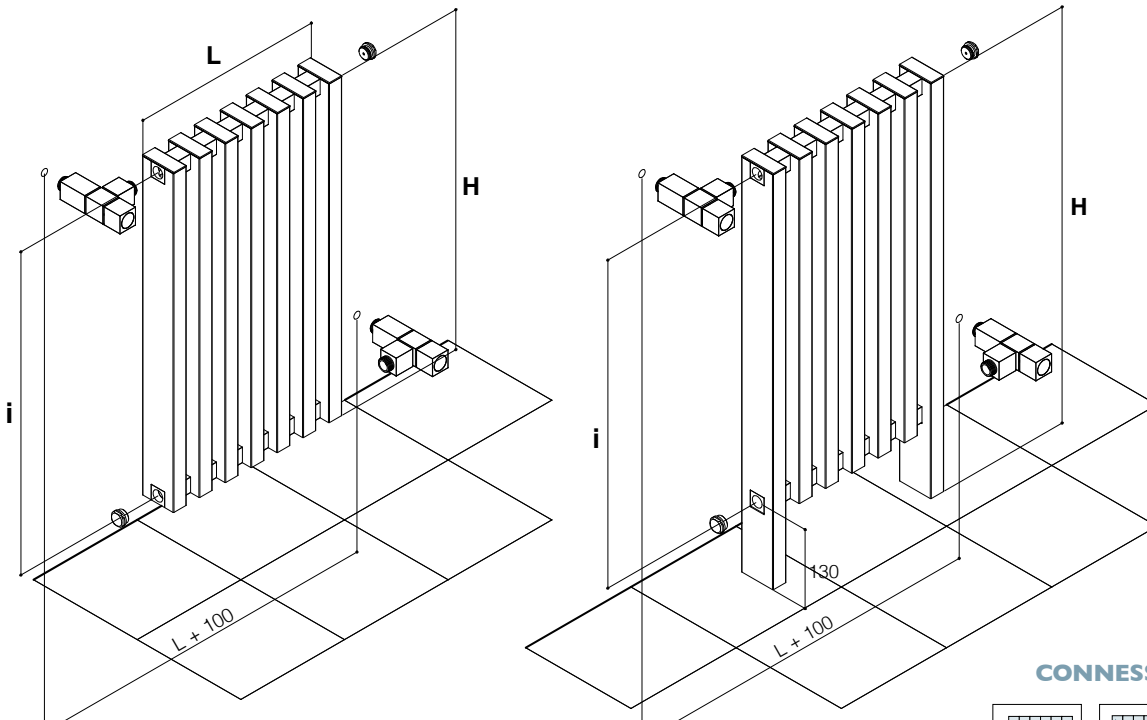


KIT VALVOLE VALVES KIT (pag. 124)


| manual | termostatic |
|--------|-------------|
| 1 | 1T + 14 |
| 2 | 2T + 14 |
| 3 | 3T + 14 |
| 4 | |
| 5 | 5T |
| 6 | |
| 7 | |
| 8 | 8T + 14 |
| 9 | 9T + 14 |
| 10 | 10T + 14 |
| 11 | |
| 12 | |
| 13 | |

● Valvole disponibili / Suitable valves

CONNESSIONI/CONNECTIONS

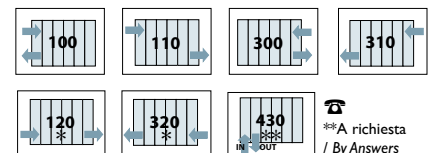

*Inserendo il diaframma fornito a kit
*By mounting the diaphragm



Kit base di elettrificazione (riempimento e resistenza)
Basic Electrification kit (filling and electric element)
Termostati / thermostats (pag. 126)